

Solid Brass Handle Sets for SECURY Automatic Door Lock



03
Polished Brass



04
Antique Brass



05
Oil Rubbed Bronze



6
Black




11
Satin Nickel



25
Dark Bronze



28
Pewter

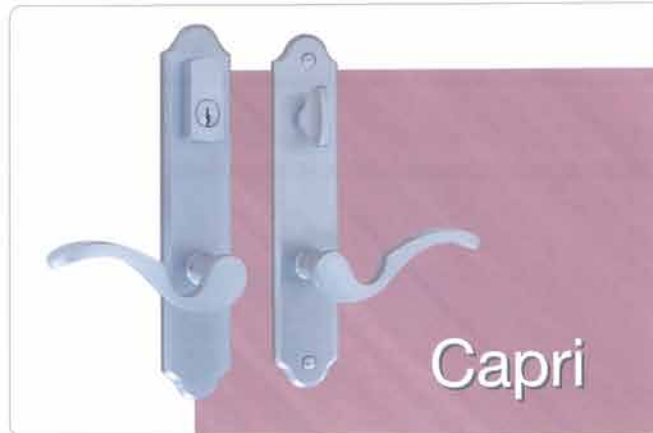

* Information on this document can be modified without notice. 04/2012

FERCO (Québec)
FERCO Ferrures de bâtiments Inc.
T 450.973.1437
1 800.355.8810
F 450.973.7661

FERCO (Ontario)
FERCO Architectural Hardware Inc.
T 905.282.9588
1 800.688.5310
F 905.282.9915

FERCO (U.S.A.)
FERCO Architectural Hardware Inc.
T 757.877.9020 / 1 800.927.1097
F 757.877.9720 / 1 888.454.0161

Simply close the door

THE SECURITY AUTOMATIC DOOR LOCK

European technology in a North American Lock

By simply closing the door the upper and lower $\frac{3}{4}$ " (20 mm) latches will instantly engage

By turning the key from outside or the knob from inside it will engage the 1" central deadbolt and block the top and bottom latches to become a **3-deadbolt locking system**

The Advantages

- 20 mm tempered steel latches engage behind the strike-plate and prevent the door from warping
- No lifting of the handle to engage locking points
- 90 degree thumbturn to engage deadbolt function
- The tapered latches always engage the keepers upon closing of the door
- The top and bottom locking points :
 - give more security
 - give better weather sealing performance
 - help reduce door warpage
- High grade 16 mm Stainless Steel faceplate for higher corrosion resistance
- RADIUS ends on faceplate for a clean look and easy installation
- Available for standard and 8 foot doors, in 45, 50 and 60 mm baskets

* Can be fitted with Ferco handle trim sets



The lock with the click
Automatic latchbolt projection
from 10 mm to 20 mm